


● **CAPILLAR DIAL THERMOMETER**



SHG-02

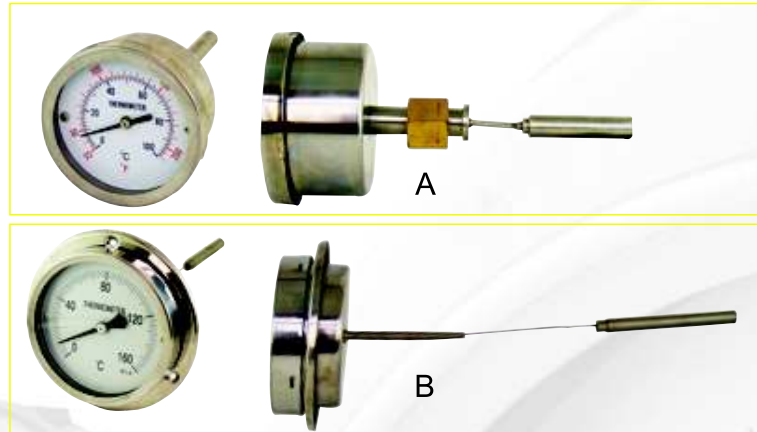

SHG-01

Model No.	Form & Flange	Range	Case	Capillary	Accuracy
SHG-01	Back connection with front flange	-50+50°C or C/F -30+50°C or C/F -20+80°C or C/F 0+100°C or C/F 0+200°C or C/F 0+300°C or C/F etc.	Stainless steel Remark: For dial 4" with bottom connection, ABS case available.	Material: Copper or stainless steel L=1m,2m,3m, etc.	±2.0%
SHG-02	Bottom connection with back flange				

● **REMOTE READING DIAL THERMOMETER**



SHL-01



SHL-02

Model No.	Form & Flange	Dial	Range	Case	Capillary	Bulb	Connection	Liquid Option	Accuracy
SHL-01	Back connection with front flange	3", 4", 6"	-50+50°C -40+70°C 0+100°C 0+200°C 0+300°C 0+400°C 0+500°C 0+600°C 50+650°C (°C or C&F)	SS304	Stainless steel L=1.5m, 2m,3m, 5m,6m, 10m,etc.	OD = Φ10 Φ12 L = 100 160 200 300 400 mm etc.	Moveable or sliding connection 1/2"NPT, BSP,BSPT, etc.	● Silicon oil filled ● Dry with filling hole	±1.5%
SHL-02	Bottom connection with back flange								