


## ● V-LINE INDUSTRIAL GLASS THERMOMETER




| Model No. | Size and Form of Body | Temp. Range   | Temp. Liquid   | Body                                    | Stem Length  |
|-----------|-----------------------|---|--|---|--|
| SHV-01    | 110x35mm Straight     | -60+40°C or C/F<br>-30+50°C or C/F<br>0+60°C or C/F<br>0+100°C or C/F<br>0+120°C or C/F<br>0+160°C or C/F<br>0+200°C or C/F<br><br>0+300°C or C/F<br>0+400°C or C/F<br>0+500°C or C/F<br>0+600°C or C/F | Blue or red organism<br>(from -60°C to 200°C)<br>(°C or C&F) | Aluminum and<br>gold colour<br>anodised | L = 30, 40, 50,<br>63, 75, 100,<br>160, 200mm,<br>etc. |
| SHV-02    | 110x35mm 90° Angle    |   |  |   |  |
|           | 110x35mm 135° Angle   |   |  |   |  |
| SHV-03    | 150x35mm Straight     |   |  |   |  |
| SHV-04    | 150x35mm 90° Angle    |   |  |   |  |
|           | 150x35mm 135° Angle   |   |  |   |  |
| SHV-05    | 200x35mm Straight     | Mercury<br>(above 200°C/400°F)  | Brass,<br>CuNi10Fe,<br>Stainless steel<br>304, 316 etc.      | 3/8", 1/2", 3/4"<br>BSP, BSPT, NPT      |  |
| SHV-06    | 200x35mm 90° Angle    |   |  |   |  |
|           | 200x35mm 135° Angle   |   |  |   |  |

### ● SIX INCH INDUSTRIAL THERMOMETER THRIFT LINE THERMOMETER

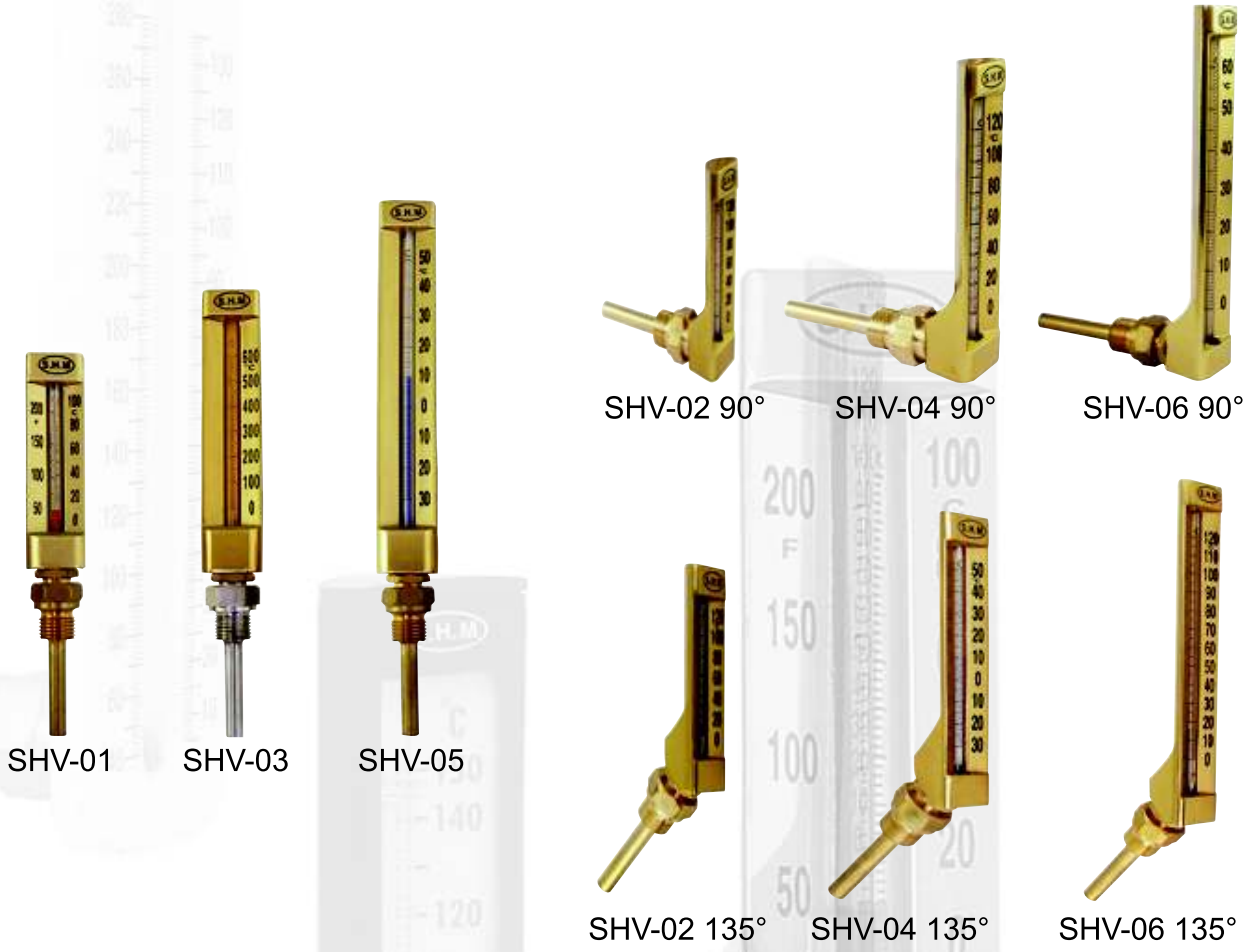

SHT-02

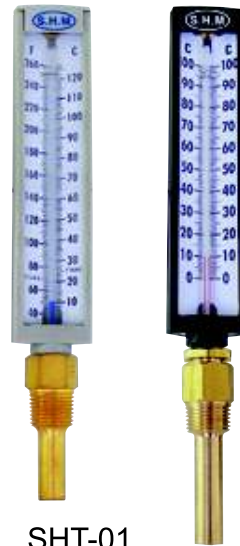

SHT-01

| Model No. | Size and Form of Body | Case                   | Range                                 | Stem Length                   | Connection                          |
|-----------|-----------------------|------------------------|---------------------------------------|-------------------------------|-------------------------------------|
| SHT-01    | 6" Straight           | ABS<br>(Grey or Black) | From<br>-60°C to 200°C<br>(°C or C&F) | 2", 2.5", 3",<br>4", 6", etc. | 1/2"<br>NPT, BSP, BSPT<br><br>Brass |
| SHT-02    | 6" 90° Angle          |                        |                                       |                               |                                     |

### ● HOT WATER THERMOMETER

|                       |                                 |              |
|-----------------------|---------------------------------|--------------|
| Model No.             | SHW-01                          | SHW-02       |
| Size and Form of Body | 6" Straight                     | 6" 90° Angle |
| Range                 | 5-135°C / 40-280°F              |              |
| Case Material         | Steel coated with white plastic |              |
| Stem Length           | 17/8"                           |              |
| Connection            | 1/2"NPT                         | Brass        |



SHW-01



SHW-02

## ● 6" INDUSTRIAL THERMOMETER

|   |  |
|---|--|
| Model No.                                     | SH6  |
| Range   | -30+50°C or C&F<br>0+50°C or C&F<br>0+100°C or C&F<br>0+160°C or C&F<br>0+200°C or C&F |
| Stem Length                                   | L = 2.5", 4", 6", etc.   |
| Case  | Black Aluminium  |
| Connection                                    | 1/2" NPT, BSP, BSPT<br>Brass, SS304, SS316, etc.                                       |
| ● Other connections and ranges are available. |  |



SH6

## ● 9" INDUSTRIAL THERMOMETER

| Model No.                                     | Range                   | Stem Length                | Case Option   |
|---|-------------------------|----------------------------|---|
| SH9-110                                       | -40+110°F /<br>-40+40°C | Standard<br>L = 3.5"<br>6" | <ul style="list-style-type: none"> <li>● Aluminium</li> <li>● Valox®<br/>(under 400°F / 200°C)</li> </ul> |
| SH9-120                                       | 0+120°F /<br>-15+50°C   |                            |   |
| SH9-160                                       | 0+160°F /<br>-15+70°C   |                            |   |
| SH9-180                                       | 30+180°F /<br>0+80°C    |                            |   |
| SH9-240                                       | 30+240°F /<br>0+110°C   |                            |   |
| SH9-300                                       | 30+300 °F /<br>0+150°C  |                            |   |
| SH9-400                                       | 50+400 °F /<br>10+200°C |                            |   |
| SH9-550                                       | 50+550 °F /<br>10+300°C |                            |   |
| SH9-750                                       | 50+750 °F /<br>10+400°C |                            |   |
| ● Other connections and ranges are available. |                         |                            |   |



SH9